



PART NUMBER:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

277V BREAKER LOCKOUT – 6PC TECHNICAL DATA SHEET

PRODUCT DESCRIPTION

This range of 'No Hole' circuit breaker lockouts are ideal for breakers that do not have any built in locking facility. The unique design, with thumb wheel operation clasps onto the switch providing secure locking protection. Can be used with lockout cleats for hard to lock longer sliding switches and switches with large angular rotation.

Lockout Cleats - Ensures positive lockout for hard to lock long sliding switch throws and switches with a large angular rotation. Snap-on and off design to use only when required.



PHYSICAL SPECIFICATIONS

Fits Switches: 16.5mm { 5/8" } wide x 11.6mm { 1/2" } thick (Up to 277 Volt).

Material: Made of rugged polypropylene and impact modified nylon.

Color: Red


APPLICATIONS

- Commercial
- Industrial
- Lockout/Tagout systems
- Domestic




ALWAYS VERIFY ELECTRICAL CIRCUITRY HAS BEEN DE-ENERGIZED PRIOR TO AND FOLLOWING THE INSTALLATION OF A CIRCUIT BREAKER LOCKOUT DEVICE IN ACCORDANCE WITH YOUR EMPLOYERS HEALTH AND SAFETY PROCEDURES.

PART NUMBER:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

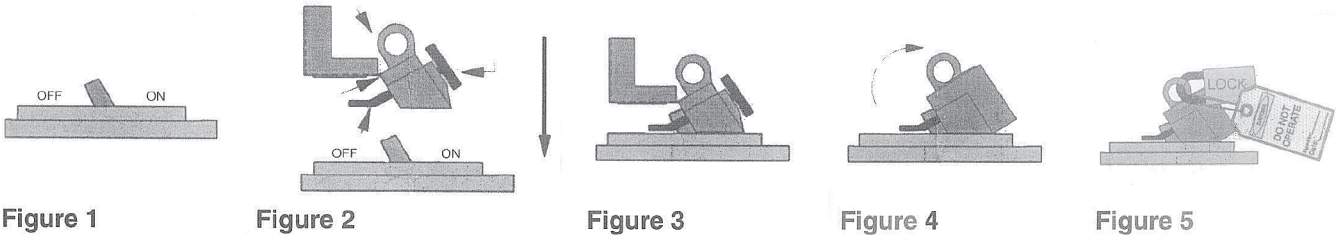

ASSEMBLY INSTRUCTIONS

1. Place circuit breaker in the **OFF** position (figure 1).
2. Place the lockout component over the circuit breaker switch tongue as shown (figure 2).
Rotate thumb wheel counter-clockwise to release the locking clamp if necessary.
3. Rotate thumbwheel clockwise to secure the lockout device to the circuit breaker switch tongue (figure 3).
4. Flip the cover over the lockout, blocking access to the thumb wheel (figure 4).
5. Verify that the circuit breaker tongue switch is securely fastened and cannot be switched on.
6. Lock in position with a padlock or lockout hasp and attach a safety tag as required (figure 5).

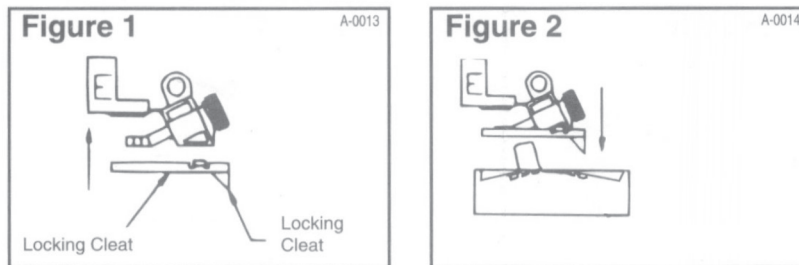

1. Snap on the locking cleat to the base of circuit breaker lockout (figure 1)
2. Once attached to circuit breaker lockout follow assembly instructions above.



PART NUMBER:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

CLEAT I

Lockout cleats, when fitted to the circuit breaker lockouts above, ensure positive lockout for hard to lock long sliding switch throws and switches with a large angular rotation.



ORDERING INFORMATION

PART NUMBER	STOCK CODE	DESCRIPTION	LENGTH	WIDTH	HEIGHT	THICKNESS
F4P LOTO SP-277	0574-3014	277V BREAKER LOCKOUT - 6PC	2.36"	0.78"	2.36"	1.97"

RESOURCES

MSDS/EDS/PRODUCT DATA SHEETS: f4p-usa.com

CUSTOMER SERVICE: 772-878-4944

DISCLAIMER

Recommendations for use of this product are based on tests we believe to be reliable. Manufacturer and seller are not responsible for results where this product is used under conditions beyond our control. If when applied as directed, this material peels, cracks or separates, it will be replaced without charge upon presentation of proof of purchase and used cartridge. This limited warranty only applies to residential use and damages including consequential damage and other remedies. No other warranties apply, including fitness for a particular purpose.